VEASE INSTRUCTIVO ANEXO

McCALL'S
3477

$13.95 USA

Price Symbol
Symbole du prix
D

One Envelope
Une Pochette
Un Sobre

Pattern/Patron
Cont. Un Patron de Costura

McCALL'S CRAFTS

3477

One Envelope
Une Pochette
Un Sobre

Pattern/Patron
Cont. Un Patron de Costura

3477

McCALL'S
CRAFTS

A FRONT

A FRONT

A

A

A BACK

A BACK

B

CUTTING LAYOUTS

A **GOWN, PETTICOA**
use pieces 1, 2, 10
(piece 8 is cut contrast,

44" thru 60"
(115cm thru 150cm)
fabric
with nap or
without nap

Gown Front And Sleeves
use pieces 4, 5

44" thru 60"
(115cm thru 150cm)
fabric
with nap or
without nap

B FRONT

B FRONT

B BACK

B BACK

B



B

B

C FRONT

C BACK

C

C

C

Neck Drape, Sleeve Drape And
use pieces 6, 7, 9

44" thru 60"
(115cm thru 150cm)
sheer fabric

Gown Facing And Petticoat Sl
use pieces 3, 11

108" (274cm)
tulle

4 PATTERN PIECES

CLOTHES A

1. GOWN
2. EXTENSION
3. FACING
4. FRONT
5. SLEEVE
6. DRAPE
7. SLEEVE DRAPE
8. HAT
9. DRAPE
10. YOKE
11. SKIRT

CLOTHES B

12. ROBE
13. SLEEVE
14. SLEEVE FACING
15. BAND
16. HAT
17. HAIR
18. BEARD
19. CAPE
20. SHOE

CLOTHES C

21. ROBE
22. SLEEVE
23. HAT
24. CAPE

Black area denotes fabric.

Pattern pieces to be placed with printed side up.

Pattern pieces to be placed with printed side down.

COAT YOKE AND EXTENSION

(rast, overlay and fusible interfacing remnants)

B ROBE, HAT AND CAPE

use pieces 12, 13, 16, 19
(piece 16 is also cut fusible interfacing remnant)
(pieces 17, 18 are cut of fake fur remnant)

44" thru 60"
(115cm thru 150cm)
fabric
with nap or
without nap

Robe Band, Sleeve Facing And Shoes

use pieces 14, 15, 20

58" 60" (150cm)
metallic knit fabric

GENERAL DIRECTIONS

SEAM ALLOWANCES

All seam allowances are 1/4" (6mm) unless otherwise indicated. Press seam allowances open unless otherwise indicated, clipping as necessary.

BACKSTITCHING

Backstitch at beginning and end of all seams to secure stitching. To backstitch, put machine in reverse and stitch again over previous stitching for about 1/2" (1.3cm).

SEWING DIRECTIONS

CLOTHES A

GOWN

To stay-stitch center RIGHT back edge of GOWN (1), machine-stitch a scant 1/4" (6mm) from raw edge between circle and square.

STAY-STITCHING

Pin FACING (3) to gown, RIGHT SIDES TOGETHER, matching notches, center fronts and circles. Stitch neck and back edges to circles.

Cut corners diagonally. Clip curves.

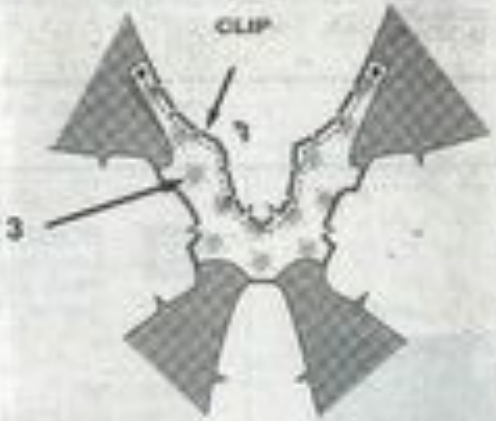

Turn facing to INSIDE. Press.

Baste facing to front, sides and armhole edges.

To stay-stitch armhole edges, machine-stitch a scant 1/4" (6mm) from raw edge . Clip to stitching.

To reinforce front, machine-stitch 1/4" (6mm) from raw edge through circles. Clip to circles.

STAY-STITCHING

Stitch center back seam from lower circle, keeping facing free.

Turn under a 1/4" (6mm) hem on low of SLEEVE (5), clipping as necessar 1/8" (3mm) from fold.

Pin sleeve to gown, RIGHT S TOGETHER, matching notches. Stitch.

Turn seam allowances toward gown.

1

Fold EXTENSION (2) in half lengthwise, RIGHT SIDES TOGETHER. Stitch ends.

Cut corners diagonally.

2

Turn RIGHT SIDE OUT. Press.

Baste raw edges together.

Pin extension to RIGHT back between circle and square. Baste, clipping to stay-stitching.

REINFORCEMENT STITCHING

Pin FRONT (4) to gown, RIGHT SIDES TOGETHER, matching notches, centers and circles. Stitch.

Press seam allowances toward gown.

4

Pin underarm seam of gown and s
RIGHT SIDES TOGETHER, mat
notches and seams. Stitch.

Clip seam allowances as necessary to
open.

To hem lower edge of gown, machine
raw edge. Press under 1/2" (1.3cm) fro

Turn under raw edge on line of basting.
ease in fulness along curve. Stitch hem

5

With RIGHT SIDES UP, pin sequin trim to lower edge of gown, turning under one end and lapping over the other at center back. Hand-sew in place.

SEQUIN TRIM

Finish short ends of DRAPE (6) with a very narrow hem. To make a very narrow hem, turn up 1/4" (6mm) on raw edge and stitch close to fold. Cut away fabric close to stitching. Turn under again, encasing raw edge. Hand-sew hem in place.

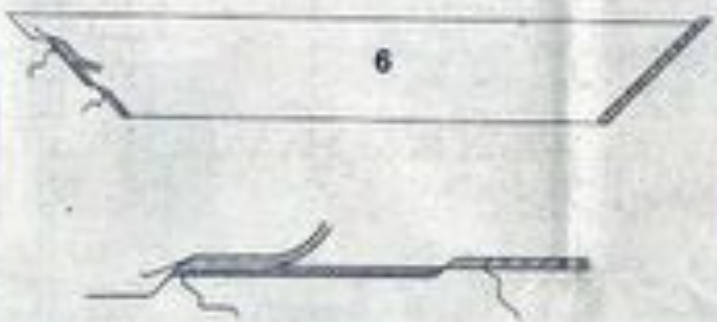

6

With RIGHT SIDES UP, pin drape to neck edge, matching center fronts. Hand-sew drape to gown through gathers.

Sew a button to drape at front gathers. Glue a rhinestone to each button.

To reinforce front edge of SLEEVE DRAPE (7), machine-stitch 1/4" (6mm) from raw edge 1" (2.5cm) each side of inward corner. Clip to inward corner.

Turn under 1/4" (6mm) on front and back edges of sleeve drape, clipping as necessary. Turn under 1/8" (3mm) on raw edge and hand-sew in place.

REINFORCEMENT STITCHING

...n and sleeve,
...ER, matching.

...essary to press

..., machine-baste 1/4" (6mm) from
...3cm) from raw edge.

...f basting. Pull up bobbin thread to
...itch hem in place. Press.

Hem long edges. Cut away points.

Hand-gather drape along solid lines.

Pull up gather tightly, bringing hemmed edges together. Secure thread ends.

REINFORCEMENT STITCHING

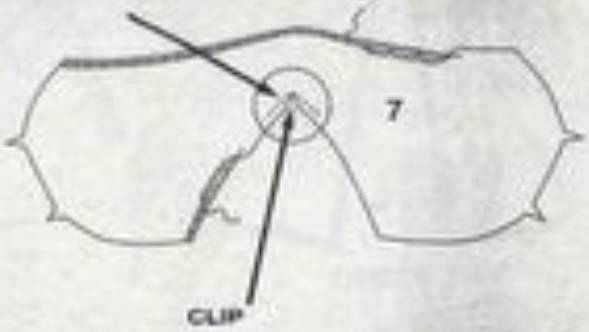

Pin drape, RIGHT SIDES TOGETHER, matching notches. Stitch between notches.

To gather, machine-baste 1/4" and 1/8" (6mm and 3mm) from raw edge, from hemmed edges to notches.

CONTINUED ON PAGE 3

Pull up bobbin threads to measure 1½" (3.5cm) on front edge and 1" (2.5cm) on back edge. Secure thread ends.

Press seam allowances toward one side.

Turn RIGHT SIDE OUT.

With RIGHT SIDES UP, pin sequin trim to drape over seam, turning under ends. Hand-sew in place.

For lacing, on OUTSIDE, make thread loops at each circle on side front seams and one in between.

THREAD LOOPS

Cut a piece of pearl cotton 17" (43cm) long.

Lace pearl cotton through thread loops, criss crossing and ending at lower edge.

Slip a pony bead then a sequin through each end of pearl cotton. Knot ends.

HAT

With RIGHT SIDES UP, pin mesh overlay to HAT (8). Baste raw edges together.

Fuse interfacing to WRONG SIDE of hat, following manufacturer's directions.

Stitch center back seam in hat.

Turn RIGHT SIDE OUT.

Hand-gather drape along center. Pull up gathers tightly. Secure thread ends.

Sew center of drape to cap of sleeve.

Sew two sequins and two seed beads to each drape over gathers.

Sew sequin and star with a seed bead to front of gown as desired.

SOCKET SECTION OF SNAP

Sew socket section of snaps to positions on OUTSIDE of right back extension.

Sew ball sections to INSIDE of LEFT back, opposite socket sections.

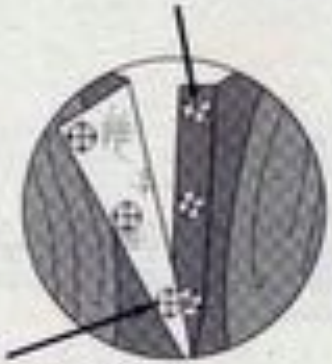

BALL SECTION OF SNAP

Press under 1/4" (6mm) on slanted edge of DRAPE (9). Press under 1/8" (3mm) on raw edge and hand-sew in place.

Finish side edges in same manner.

Hand-gather 1/4" (6mm) from raw edge. Pull up gathers tightly. Secure thread ends.

overlay
er.

8

Tuck gathered end of drape 1/4" (6mm) into opening at top of hat. Hand-sew in place.

With RIGHT SIDES UP, pin sequin trim to lower edge of hat, turning under one end and lapping over the other at center back. Hand-sew in place.

SEQUIN

Fold skirt in half, WRONG SIDES TOGETHER, matching centers. Pin.

To gather, machine-baste 1/4" and 1/8" (6mm and 3mm) from fold edge.

of hat.

PETTICOAT

Machine-stitch 1/4" (6mm) from upper edge of YOKE (10).

Turn under upper edge on line of stitching, clipping as necessary. Stitch 1/8" (3mm) from fold.

10

Pin skirt to yoke, RIGHT SIDES TOGETHER, matching centers. Pull up bobbin threads and adjust gathers to fit. Baste. Stitch.

Turn seam allowances toward yoke.

edge of
mm) on

w edge.
ad ends.

Press under 1/4" (6mm) on LEFT back. Stitch 1/8" (3mm) from fold.

Lap LEFT back over RIGHT, matching centers. Baste across lower edge.

Stitch center back seam in SKIRT (11), RIGHT SIDES TOGETHER, matching notches.

WAND

Cut a piece of pipe cleaner 5" (12.5cm) long.

Glue beads to each end of wand as desired.

Wrap elastic around wand and tie in a knot, having ends extending evenly.

CONTINUED ON PAGE 4

Place wand in doll's hand. Wrap elastic around doll's wrist and knot ends. Cut elastic close to knot if desired.

CLOTHES B

ROBE

Pin ROBE (12) sections, RIGHT SIDES TOGETHER, matching notches. Stitch center front seam.

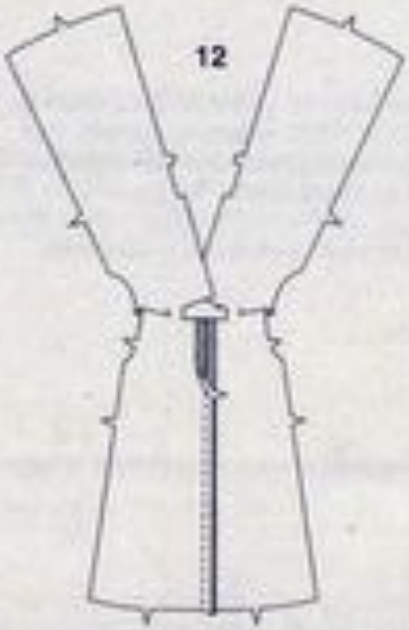

Machine-stitch 1/4" (6mm) from neck edge.

Turn under on line of stitching, clipping to inward corners. Stitch in place 1/8" (3mm) from fold.

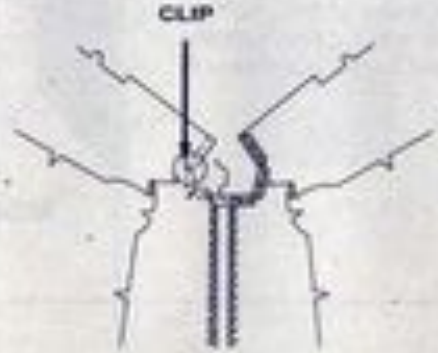

To stay-stitch armholes, machine-stitch a scant 1/4" (6mm) from raw edge. Clip to stitching.

Press under 1/4" (6mm) on RIGHT back extension. Stitch 1/8" (3mm) from fold.

STAY-STITCHING

Stitch center back seam from lower edge to circle. Clip RIGHT back seam allowance below extension.

Pin SLEEVE (13) to robe, RIGHT SIDES TO notches and squares. Stitch between square

Press seam allowances toward robe.

Pin underarm seam of robe and slee TOGETHER, matching notches and squa stitching at squares.

With RIGHT SIDES UP, pin ribbon to front of robe, centering over seam. Stitch close to long edges of ribbon.

Stitch close to long edges of ribbon again using a zigzag stitch.

RIBBON

On INSIDE, carefully cut away fabric under ribbon close to zigzag stitching.

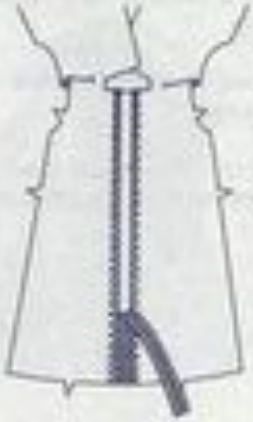

STAY-STITCHING

Stitch center back seam from lower edge to circle. Clip RIGHT back seam allowance below extension.

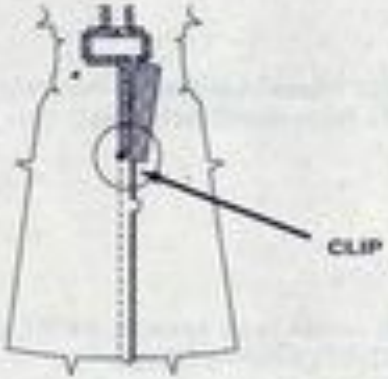

CLIP

Press seam allowances open, continuing to press under LEFT extension on fold line.

Open out LEFT extension. Turn under 1/4" (6mm) on raw edge and hand-sew in place.

Stitch seam in SLEEVE FACING (14). RIG
SIDES TOGETHER, matching notches.

Pin sleeve facing to lower edge of slee
TOGETHER, matching notches and seams.

Cut corners diagonally. Clip curves.

CLIP

HT SIDES TOGETHER, matching
etween squares.

robe.

e and sleeve, RIGHT SIDES
es and squares. Stitch, breaking

Turn facing to INSIDE. Press.

Hand-sew upper edge of facing to sleeve.

Pin two BAND (15) sections, RIGHT SIDES TOGETHER. Stitch side seams.

15

Stitch remaining band sections in

Turn seam allowances toward robe.

With RIGHT SIDES UP, pin narrower trim to lower edge of robe, centering over band seam and turning under one end and lapping over the other at center back. Hand-sew in place.

TRIM

Pin narrower trim to sleeve over solid line, turning under one end and lapping over the other at seam. Hand-sew in place.

Sew socket section of snaps to positions on OUTSIDE of RIGHT back.

NG (14), RIGHT
notches.

14

dge of sleeve, RIGHT SIDES
s and seams. Stitch.

rves.

Stitch remaining band sections in same manner.

Pin band sections, RIGHT SIDES TOGETHER, matching notches, centers and seams. Stitch UN-NOTCHED edge.

Turn RIGHT SIDE OUT. Press.

Baste raw edges together, matching notches.

Pin band to lower edge of robe, RIGHT SIDES TOGETHER, matching notches, centers and seams. Stitch.

Sew socket section of snaps to positions on OUTSIDE of RIGHT back.

Sew ball sections to INSIDE of LEFT back, opposite socket sections.

SOCKET SECTION OF SNAP

BALL SECTION OF SNAP

Use a 2" x 6" (5cm x 15cm) piece of cardboard.

Make two tassels. For each tassel, wrap pearl cotton 12 times around 2" (5cm) measurement.

Slip a piece of pearl cotton through upper loops and tie firmly. Cut loops at other edge.

Wrap another piece of pearl cotton several times around tassel, 1/4" (6mm) from upper loops. Secure ends.

CONTINUED ON PAGE 5

Hand-sew a tassel to point of each sleeve.

For tie belt, cut a piece of cord 24" (61cm) long.

Tie a knot 1½" (3.2cm) from each end. Fringe ends below knot.

When wearing, wrap tie belt two times around waist and tie in a bow in front.

Turn RIGHT SIDE OUT.

With RIGHT SIDES UP, lap back of hat 1/8" (3mm) over straight edge of HAIR (17), matching centers. Hand-sew in place.

With RIGHT SIDES UP, pin ribbon to hat, having lower edges even and butting ends at center back. Stitch close to lower edge of ribbon.

Slipstitch ends of ribbon together.

NOTE: Elastic strap is optional.

Hand-sew one end of a 3" (7.5cm) piece of elastic to INSIDE of beard just below hat. Pin free end to other side of beard.

Place hat on doll's head and adjust strap if necessary.

Remove hat. Hand-sew free end of strap in place. Trim excess strap if necessary.

STAR BEA

Hand-sew star bead to top of hat.

CAPE

Starting at circle, place cord on C
solid lines to square, hand-sewing
and DO NOT hand-sew at cross p

HAT

Fuse interfacing to WRONG SIDE of HAT (16), following manufacturer's directions.

Stitch center back seam in hat.

Cut corner diagonally.

Place hat on doll's head.

Center BEARD (18) over doll's face just below nose, slipping pointed ends under hat. Pin.

Remove hat and tack ends of beard in place.

Work from square back to circle,
previously applied cord, hand-se
circle.

Add fabric sealant to beginning an

onal.

a 3"
tic to
w hat.
de of

d and

free
Trim

TAR BEAD

of hat.

Pin CAPE (LINING) (19) to cape. RIGHT SIDES TOGETHER. Stitch, leaving an opening on lower edge for turning.

Cut corners diagonally. Clip curves.

Turn RIGHT SIDE OUT. Press.

Slipstitch opening edges together.

Sew a button to OUTSIDE of cape at front neck edges.

Glue a rhinestone to each button.

SHOES

Fold each SHOE (20) on fold line, RIGHT SIDES TOGETHER. Stitch center seams.

20

Cut corners diagonally. Clip curves.

Turn RIGHT SIDE OUT.

WAND

ord on OUTSIDE of CAPE (19) along
d-sewing as you go. DO NOT cut cord
t cross points.

o circle, weaving cord over and under
hand-sewing as you go. Cut cord at

nning and ends of cord.

With RIGHT SIDES UP, pin wider trim to cape, having straight edge along finished edges, folding at corners and turning under one end and lapping over the other at center back. Stitch in place.

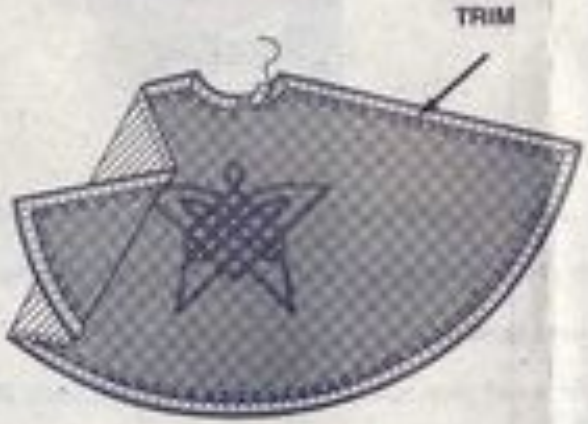

Cut a 2½" (6.3cm) piece of narrower trim.

Hand-sew ends of trim to WRONG SIDE of cape at neck edge, leaving a 1½" (3.8 cm) span between front edges of cape.

WAND

Paint dowel.

Glue beads to each end of wand as desired.

Wrap elastic around wand and knot, having ends extending evenly.

Place wand in doll's hand. Wrap elastic around doll's wrist and knot ends. Cut elastic close to knot if desired.

CONTINUED ON PAGE 6

CLOTHES C

ROBE

With RIGHT SIDES UP, pin trim to ROBE (21), centering over front. Hand-sew in place.

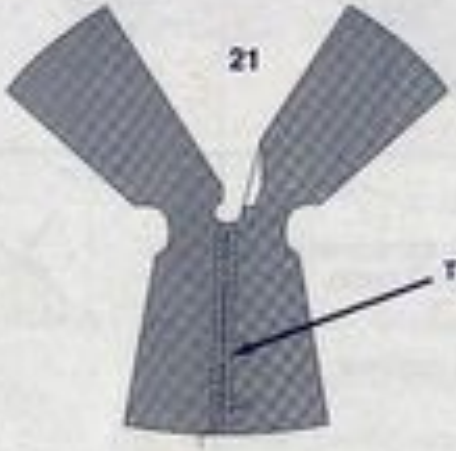

Machine-stitch 1/4" (6mm) from neck edge.

Turn under on line of stitching, clipping curve. Stitch in place 1/8" (3mm) from fold.

To stay-stitch armhole edges, machine-stitch a scant 1/4" (6mm) from raw edge. Clip to stitching.

Pin sleeve to robe, RIGHT SIDES TOGETHER, matching notches. Stitch.

Press seam allowances toward sleeve.

Pin underarm seam of robe and sleeve, RIGHT SIDES TOGETHER, matching notches and seams. Stitch.

Turn under 1/4" (6mm) on lower edge of robe. Stitch in place 1/8" (3mm) from fold.

With RIGHT SIDES UP, pin trim to robe, having lower edges even. Hand-sew in place.

HAT

Fuse interfacing to WRONG SIDE of HAT (23), following manufacturer's directions.

Stitch seam in hat.

Turn RIGHT SIDE OUT.

With RIGHT SIDES UP, pin trim to lower ed of hat, turning under one end and lapping ov

To stay-stitch armhole edges, machine-stitch a scant 1/4" (6mm) from raw edge. Clip to stitching.

STAY-STITCHING

Turn under 1/4" (6mm) on lower edge of SLEEVE (22). Stitch in place 1/8" (3mm) from fold.

Finish lower edge of sleeve with a BLANKET STITCH.

To make a BLANKET STITCH, thread needle with one strand of embroidery floss.

Working from LEFT to RIGHT, bring needle up at 1 (edge of fabric). Insert at 2 (hem stitching). Insert at 3 (directly below edge), pulling needle through loop formed by thread. Repeat, keeping stitches and spacing even.

Turn under 1/4" (6mm) on LEFT back opening edge. Press.

Use a 1/4" x 3½" (6mm x 8.2cm) piece of Velcro® fastener.

Separate fastener.

Pin hook half (firm side) to OUTSIDE of RIGHT back. Stitch in place.

Pin loop half (soft side) to INSIDE of LEFT back, opposite hook half. Stitch in place.

LOOP HALF (SOFT SIDE)

HOOK HALF (FIRM SIDE)

Turn RIGHT SIDE OUT.

With RIGHT SIDES UP, pin trim to lower ed of hat, turning under one end and lapping ov the other at seam. Hand-sew in place.

TRIM

For strap, hand-sew one end of a 3" (7.5cm) piece of elastic to INSIDE of hat at one circle. Pin free end to remaining circle.

Place hat on doll's head and adjust strap if necessary.

Remove hat. Hand-sew free end of strap in place. Trim excess strap if necessary.

IDE of
turer's

23

Using one strand of embroidery floss, cut a piece of floss 4" (10cm) long.

Thread a bead through each end of floss. Tie a knot at each end to secure bead.

Tack center of floss to top of hat.

CAPE

Pin CAPE (LINING) (24) to CAPE (24), RIGHT SIDES TOGETHER. Stitch, leaving an opening on lower edge for turning.

Cut corners diagonally. Clip curves.

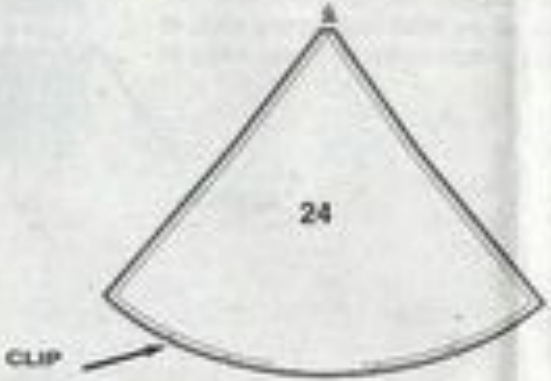

Turn RIGHT SIDE OUT. Press.

Turn upper edge of cape to OUTSIDE on fold line. To form casing, stitch 1/4" (6mm) from fold.

Insert narrow cord through casing, having ends even. Tack at center.

Tie a knot 1" (2.5cm) from each end of cord. Fringe ends below knot.

Use a piece of cardboard 1¼" x 2" (3.2cm x 5cm).

For tassel, wrap pearl cotton 6 times around 1¼" (3.2cm) measurement.

Slip a piece of pearl cotton through upper loops and tie firmly. Cut loops at other edge.

Wrap another piece of pearl cotton several times around tassel, 1/4" (6mm) from upper loops. Secure ends.

ns to lower edge
and lapping over
in place.

of a 3" (7.5cm)
of hat at one
ng circle.

adjust strap if

end of strap in
cessary.

Slipstitch opening edges together.

Finish outer edges of cape with a BLANKET STITCH.

To make a BLANKET STITCH, thread needle with one strand of embroidery floss.

Working from LEFT to RIGHT, bring needle up at 1 (edge of fabric). Insert at 2 (desired distance from edge of fabric). Insert at 3 (directly below edge), pulling needle through loop formed by thread. Repeat, keeping stitches and spacing even.

Hand-sew tassel to point of cape.

WAND

Cut a piece of pipe cleaner 3" (7.5cm) long.

Glue beads to each end of wand as desired.

Wrap a 5" (12.5cm) piece of elastic around wand and knot, having ends extending evenly.

Place wand in doll's hand. Wrap elastic around doll's wrist and knot ends. Cut elastic close to knot if desired.

IMPORTANT: 1/4" SEAMS are allowed on all sewing edges unless otherwise specified on the pattern.

1/2" (1.3cm) Hem allowed

Center Back

McCALL'S 9477

Grain

2 EXTENSION A

allowed on all sewing
specified on the pattern.
5
SLEEVE A
Cut 2
McCALL'S
3477
Square For Right Side
Center
Front
Place on
fold

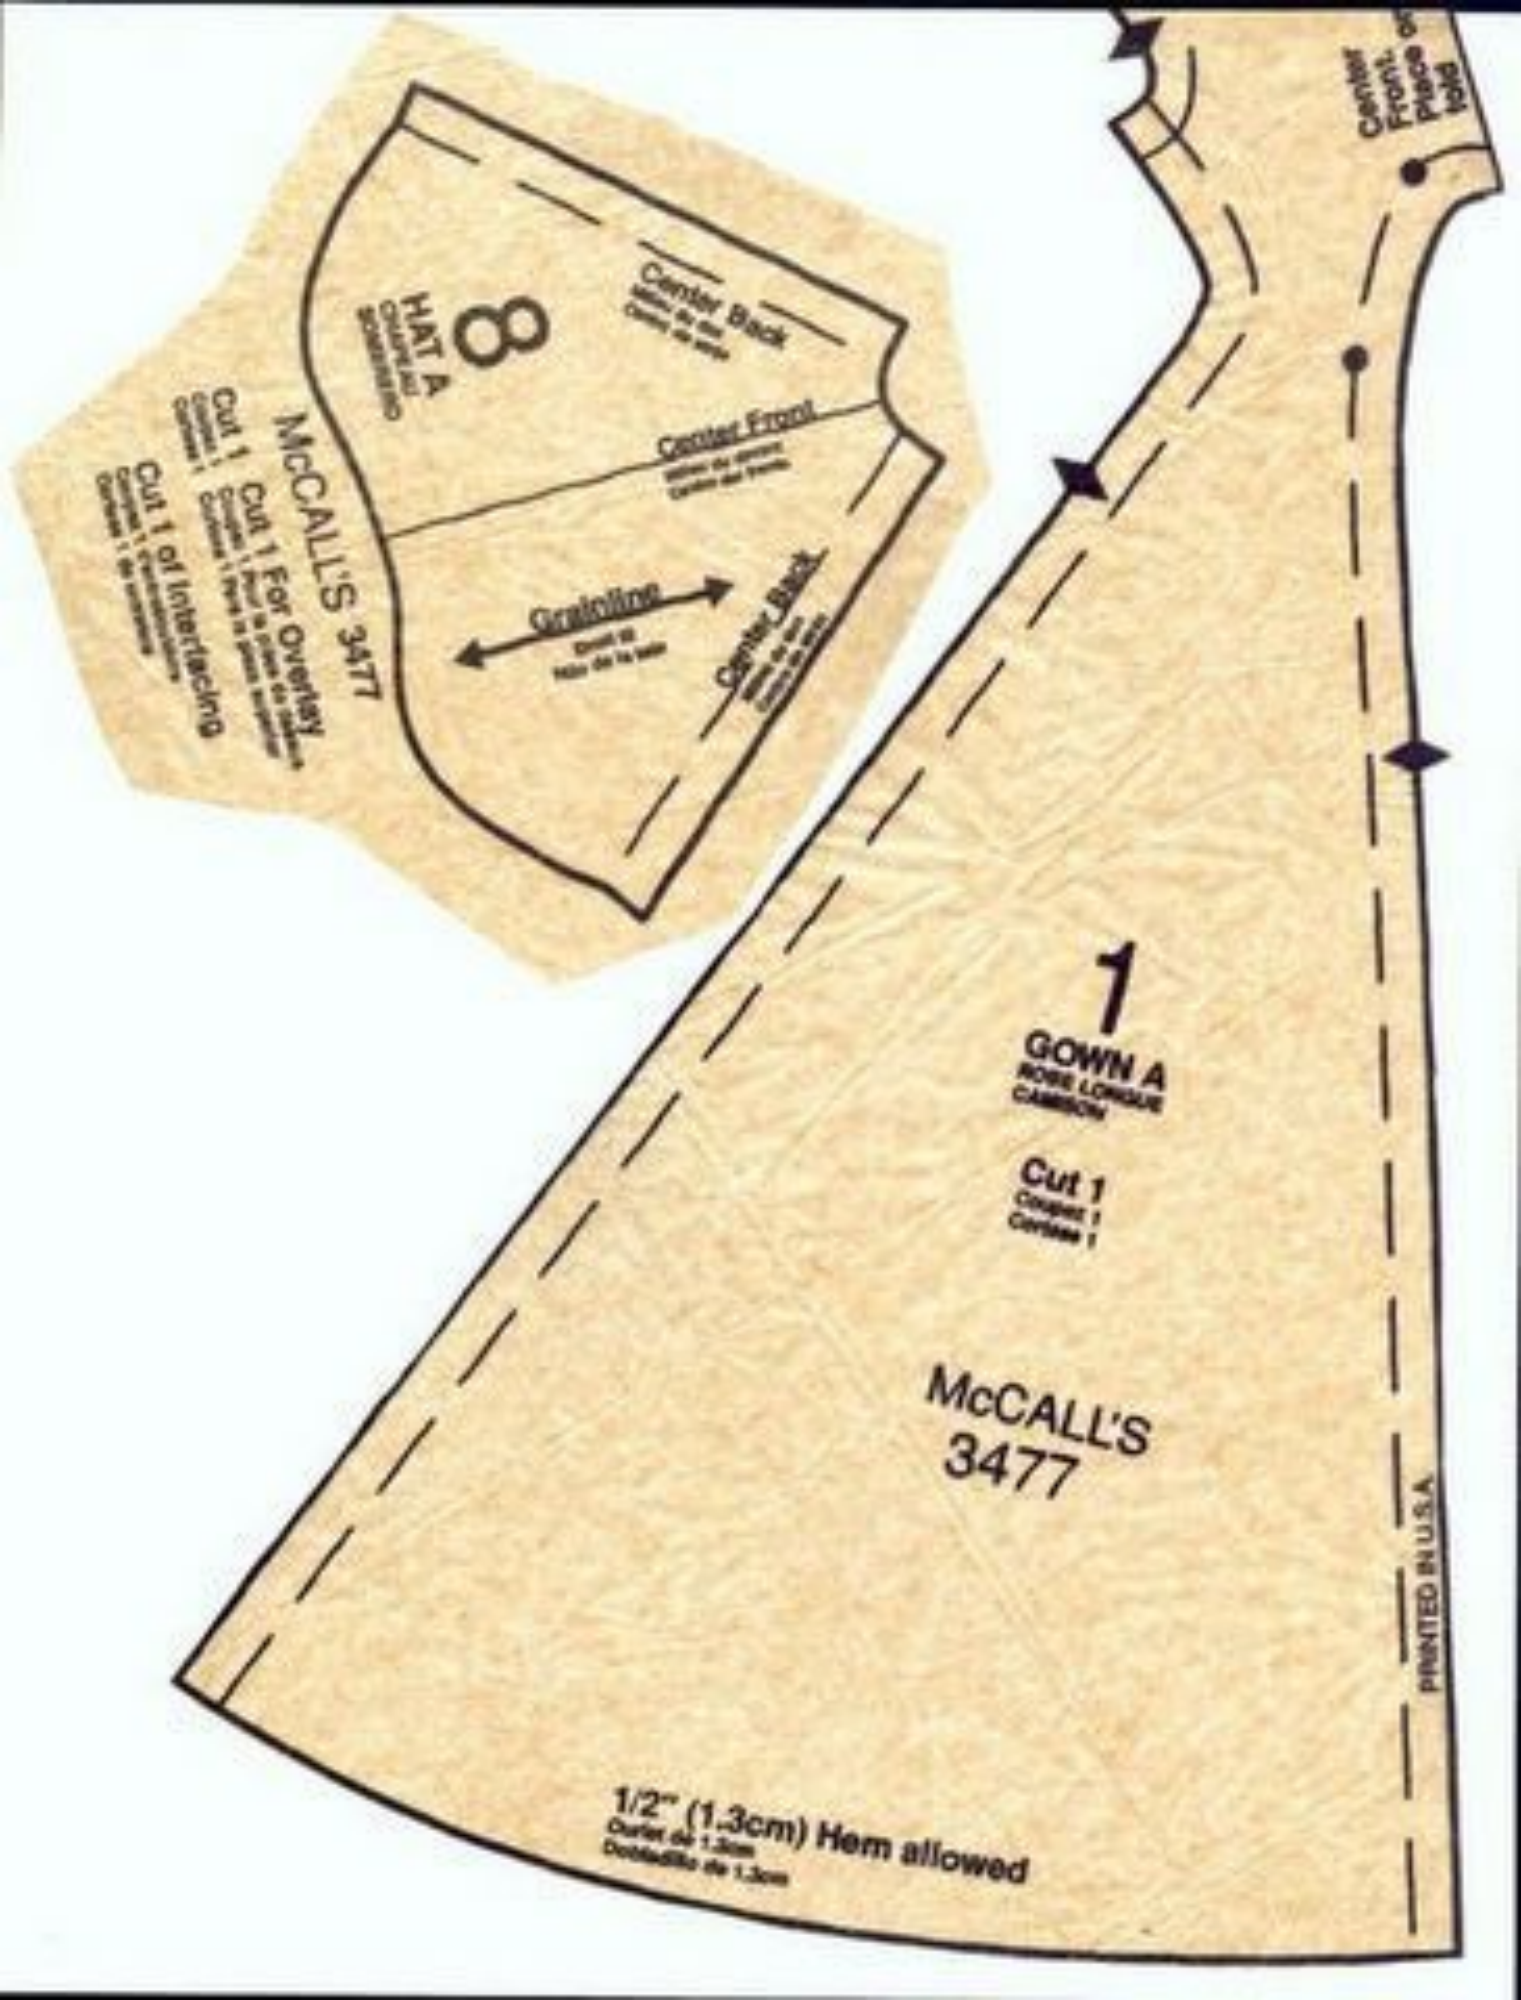
8
HAT A
Center Back
Center Front
Grainline
Center Back
McCALL'S 3477
Cut 1
Cut 1 For Overlay
Cut 1 of Interfacing
1
GOWN A
Cut 1
McCALL'S
3477
1/2" (1.3cm) Hem allowed
PRINTED IN U.S.A.

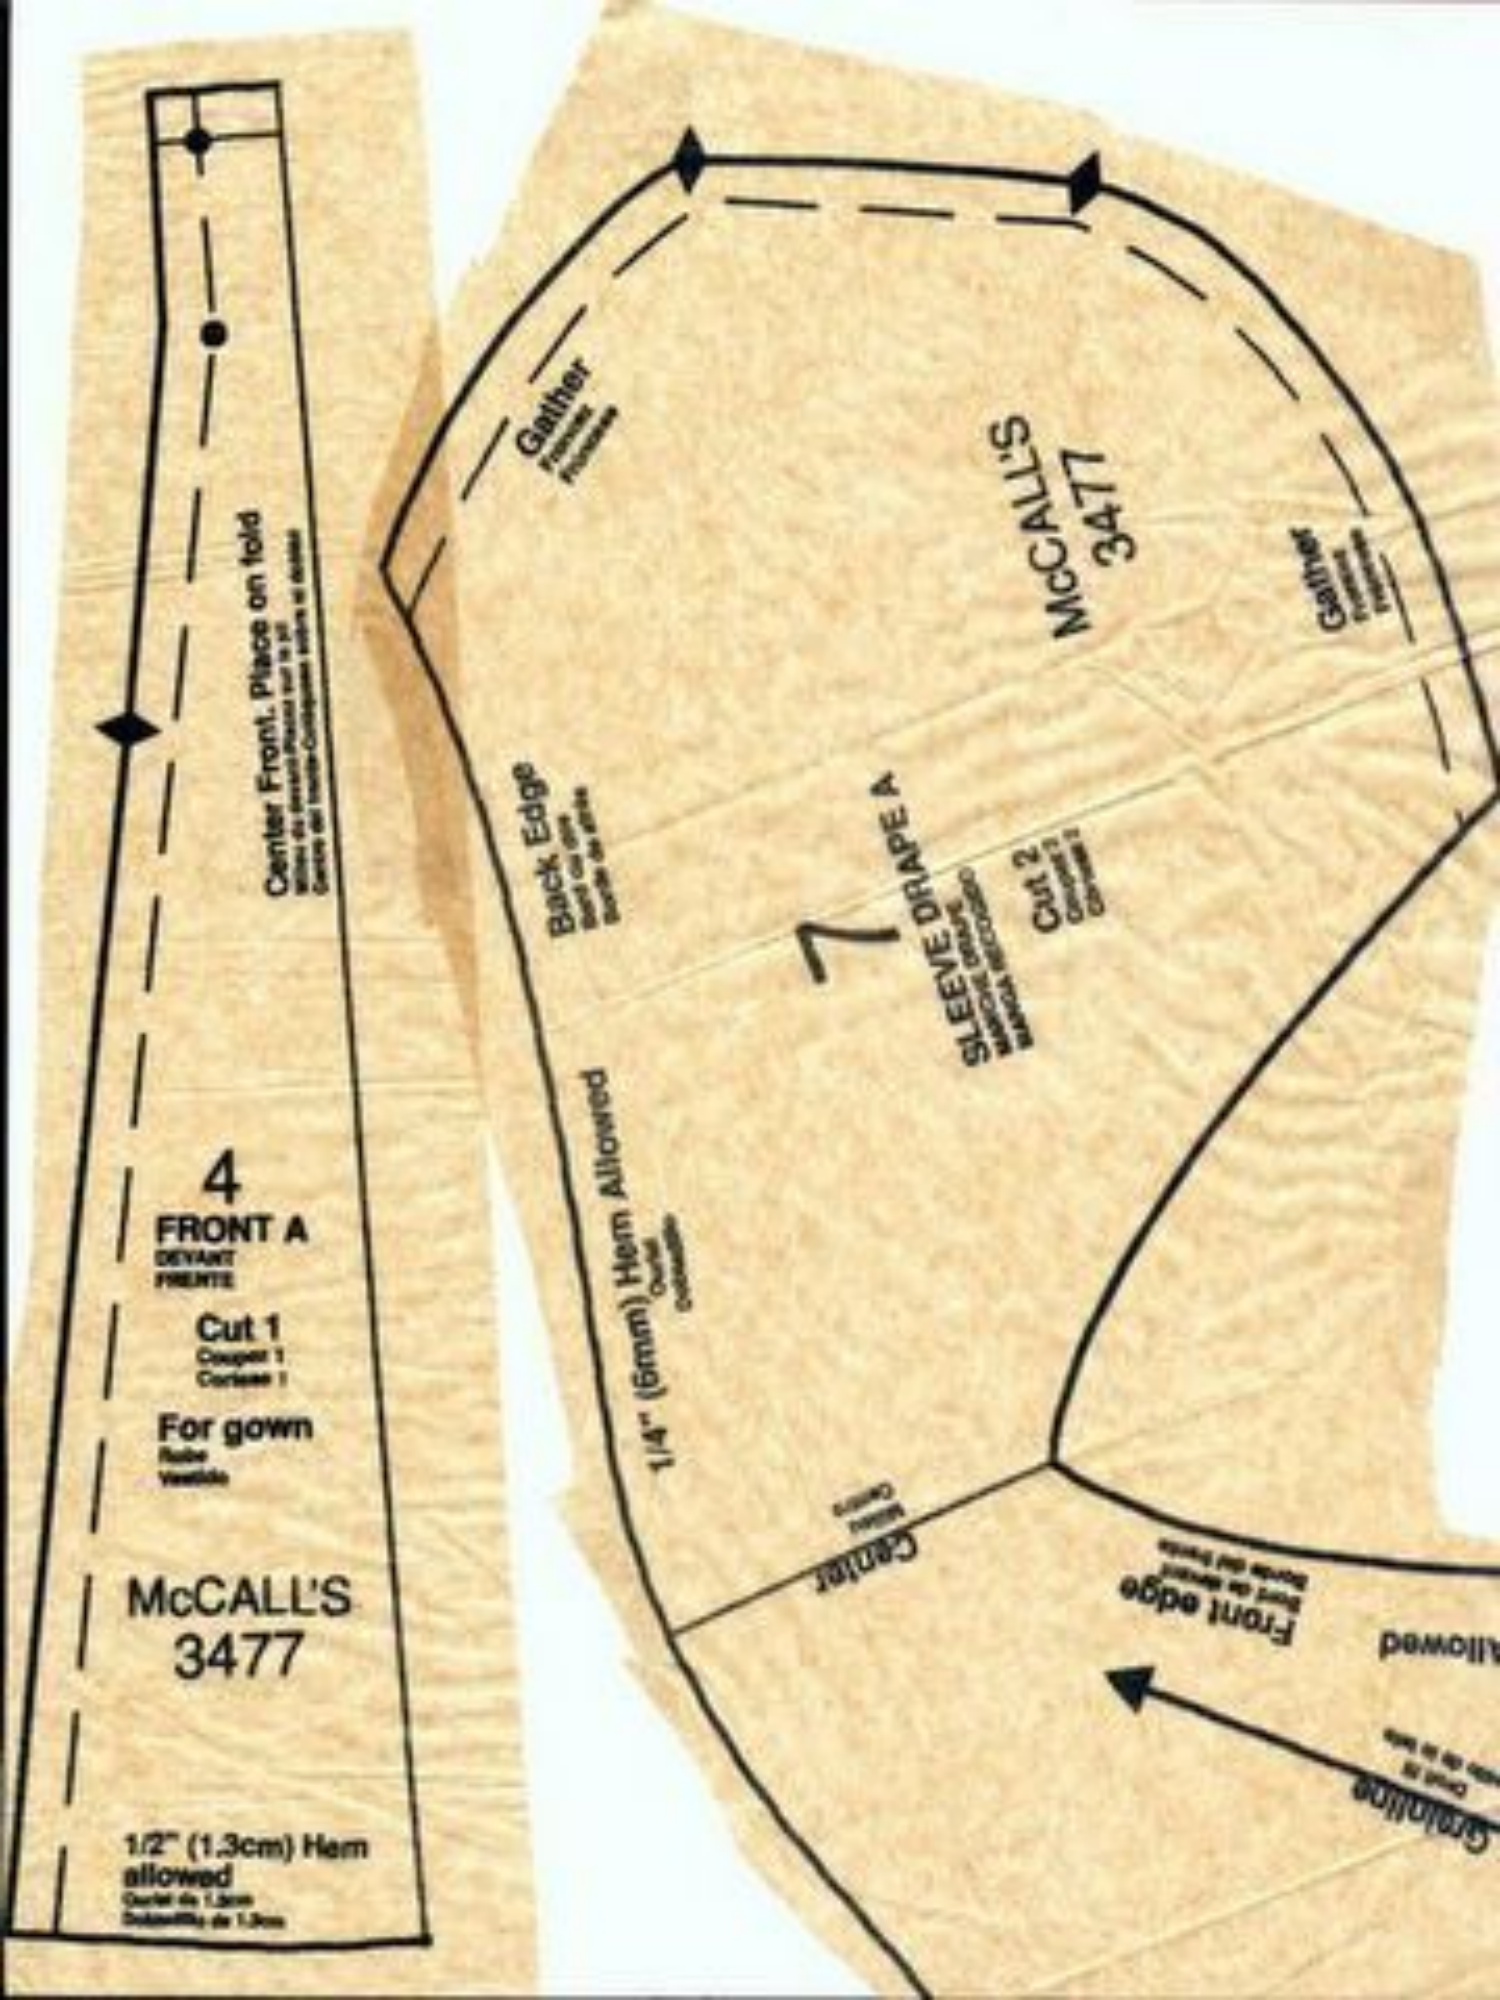
Center Front. Place on fold
4
FRONT A
Cut 1
For gown
McCALL'S
3477
1/2" (1.3cm) Hem allowed
Gather
McCALL'S
3477
Gather
Back Edge
7
SLEEVE DRAPE A
Cut 2
1/4" (6mm) Hem Allowed
Center
Front edge

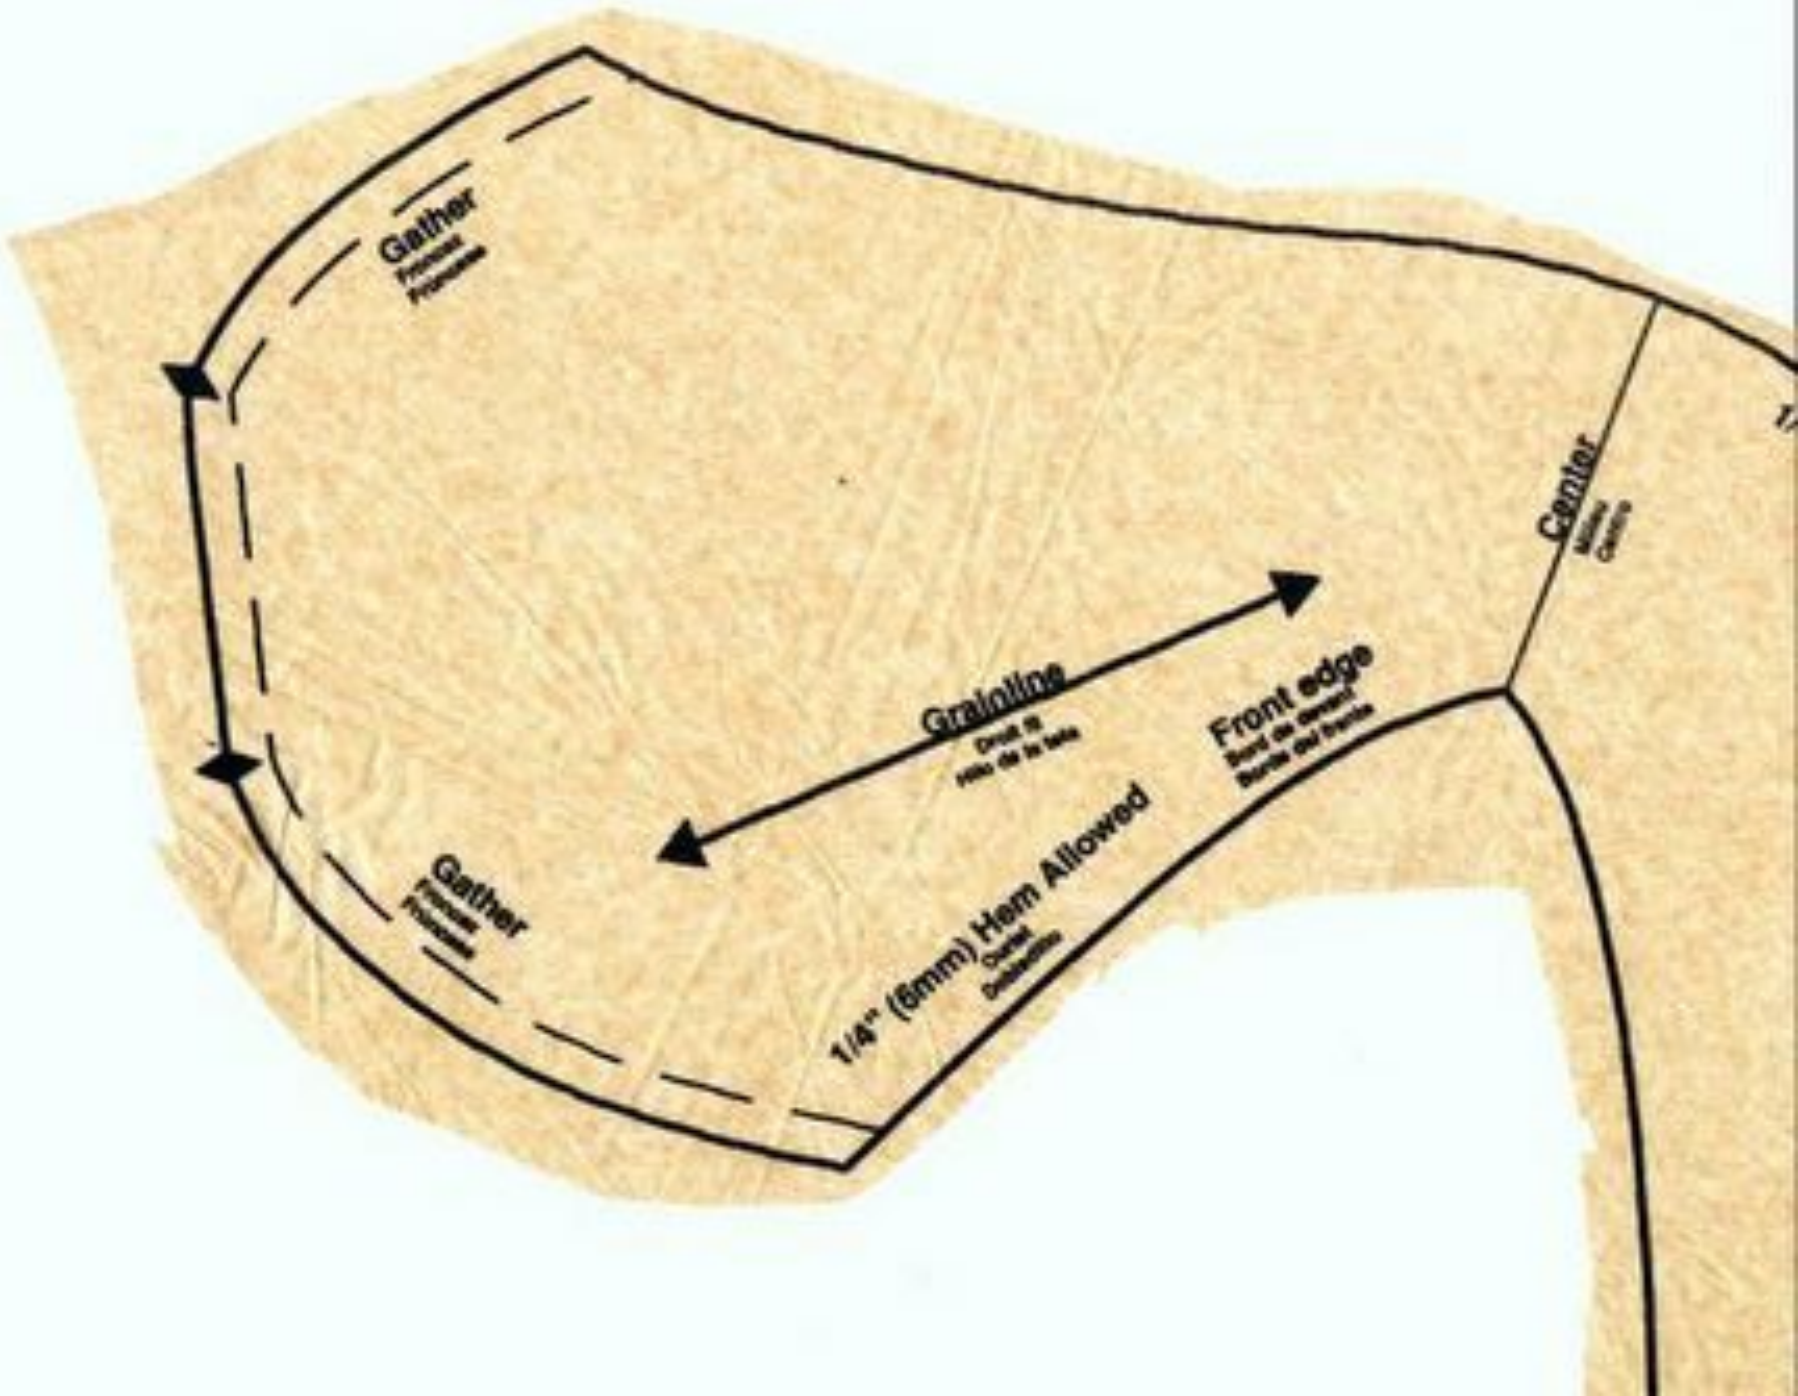
Gather
Gather
Grainline
Front edge
1/4" (6mm) Hem Allowed
Center

3/8" (1cm) Hem Allowed

3/8" (1cm) Hem Allowed

Grainline

A 6A

McCALL'S
3477

9
DRAPE A

Cut 1

For Hat

1/4" (6mm) Hem Allowed

1/4" (6mm) Hem Allowed

Grainline

1/4" (6mm) Hem Allowed

McCALL'S
3477

15

Cut 4

BAND B
BANDE
BANDA

For Robe

Center Front or Center Back Place on fold

6

DRAPE A

Cut 1

3/8" (1cm) Hem

Center Front

14

Cut 2

SLEEVE FACING B

Gathering

McCALL'S
3477

6B

6
DRAPE A

Cut 1

3/8" (1cm) Hem Allowed

McCALL'S
3477

3/8" (1cm) Hem Allowed

Center Back

McCALL'S
3477

Center Front

10
YOKE A

For petticoat

Cut 1

Center Back

11
A

Center Front. Place on fold

11

SKIRT A

JUPE
FALDA

Cut 1
Coupez 1
Cortese 1

For petticoat
Pour le jupon
Para las enaguas

McCALL'S
3477

11
A

11

SKIRT A

JUPE
FALDA

Cut 1
Coupez 1
Corte 1

For petticoat
Pour le jupon
Para las enaguas

McCALL'S
3477

11
B

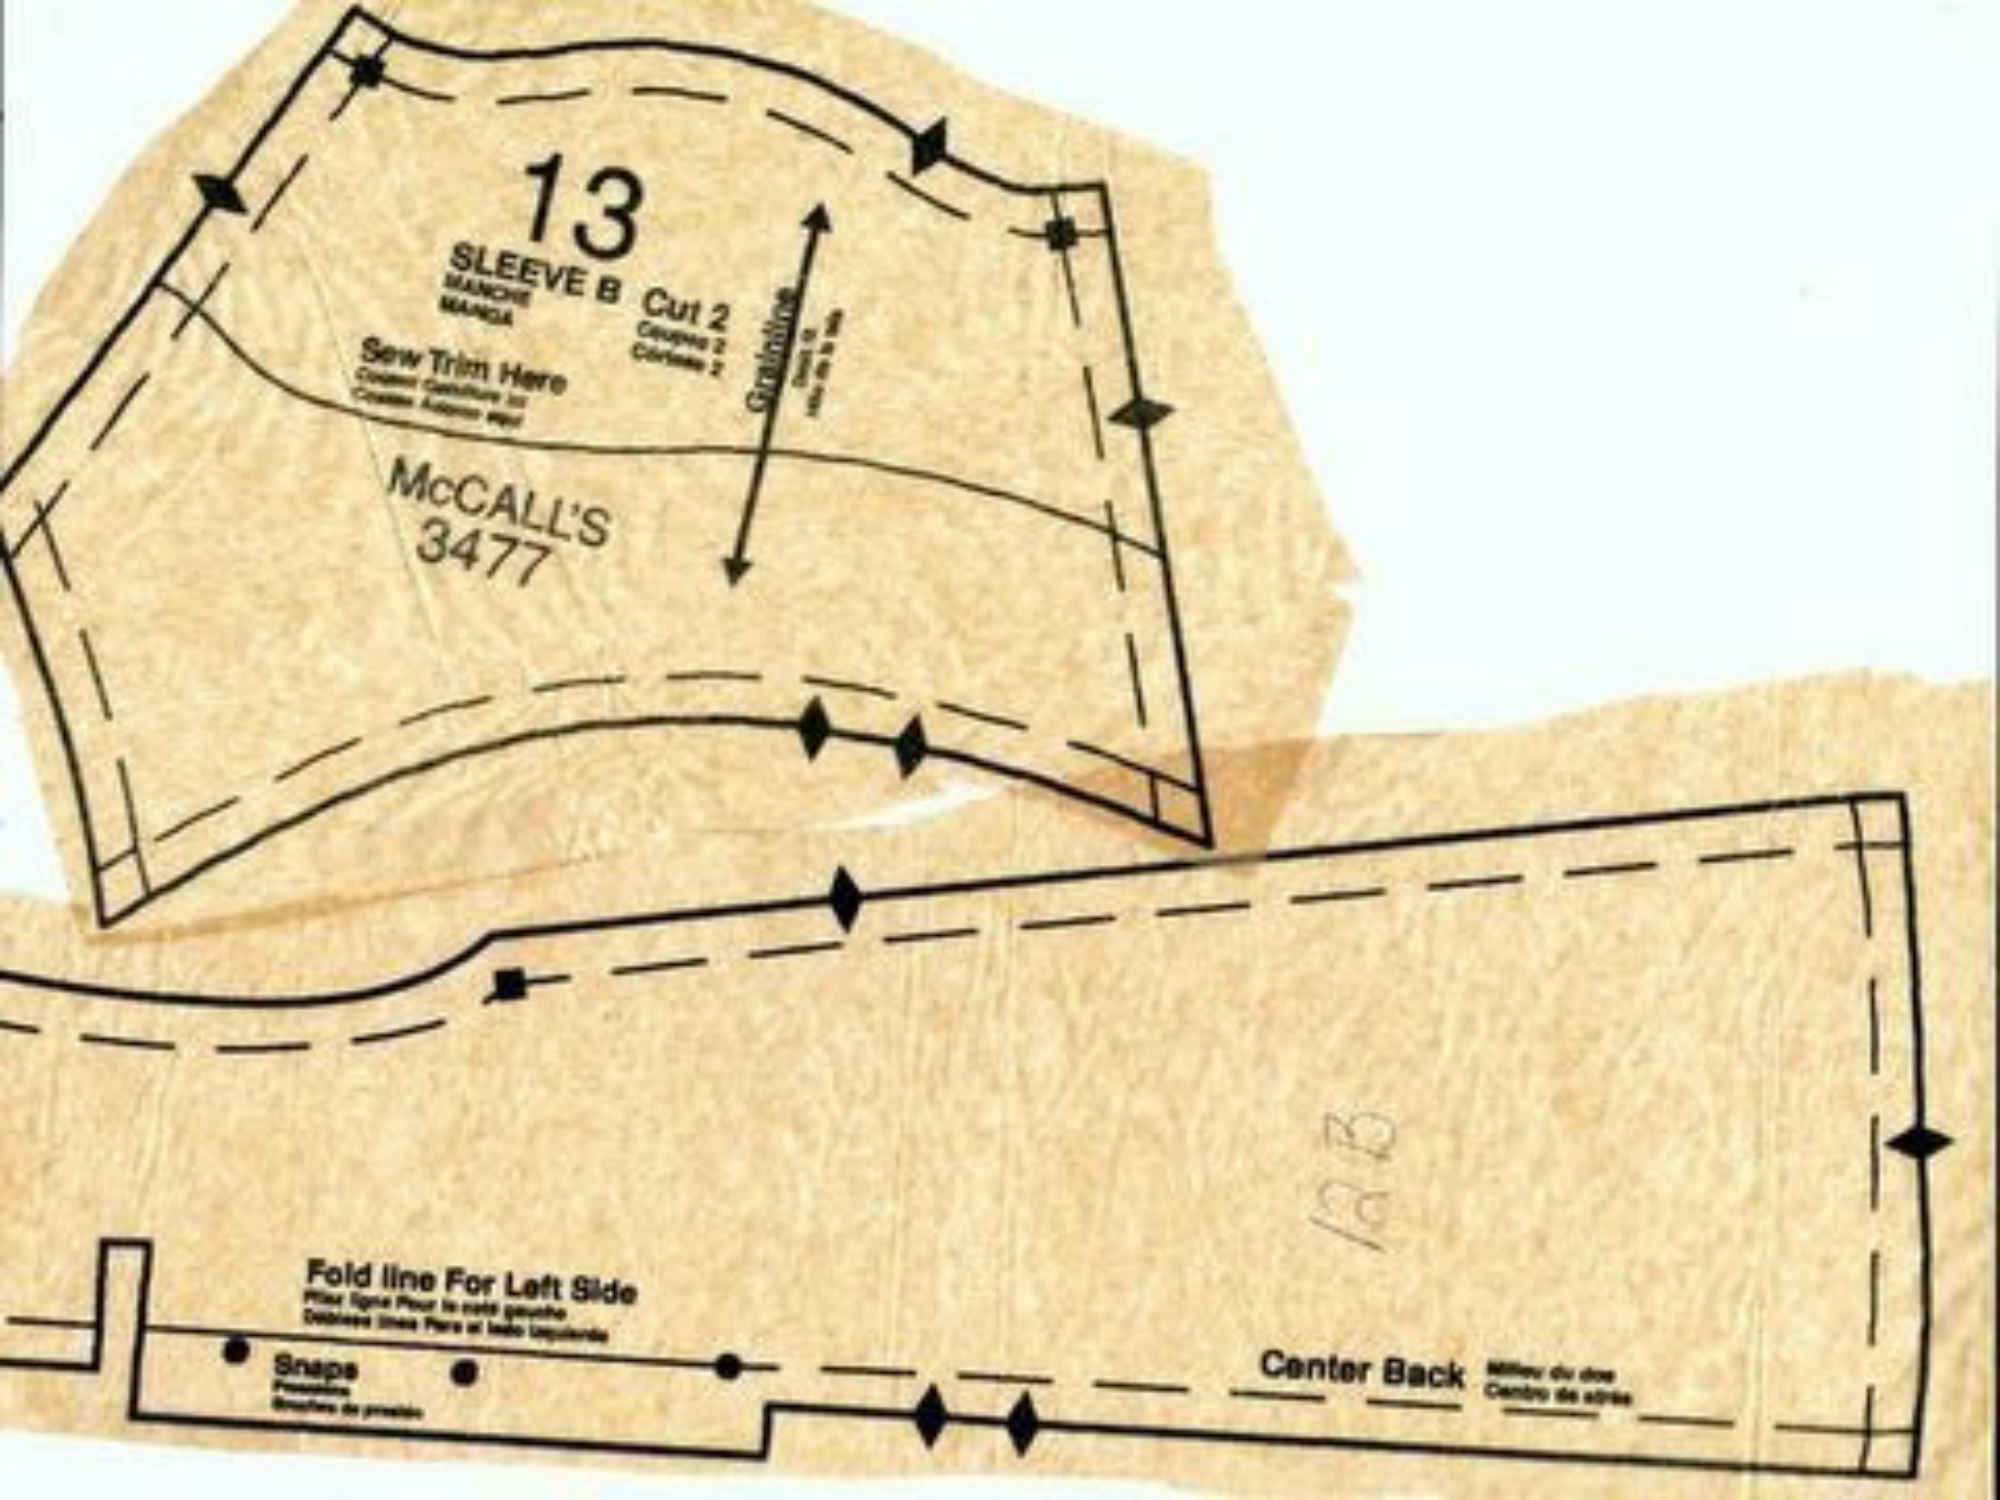
13
SLEEVE B
MANCHE
MANGA
Cut 2
Sew Trim Here
McCALL'S
3477
Fold line For Left Side
Snaps
Center Back

McCALL'S
3477
12
ROBE B
Cut 2
Grainline
Center Front
17
HAIR B
McCALL'S
3477
McCALL'S 3477
18
BEARD B
Grain
16
HAT B
Center Back
Center Front
Grainline
McCALL'S
3477

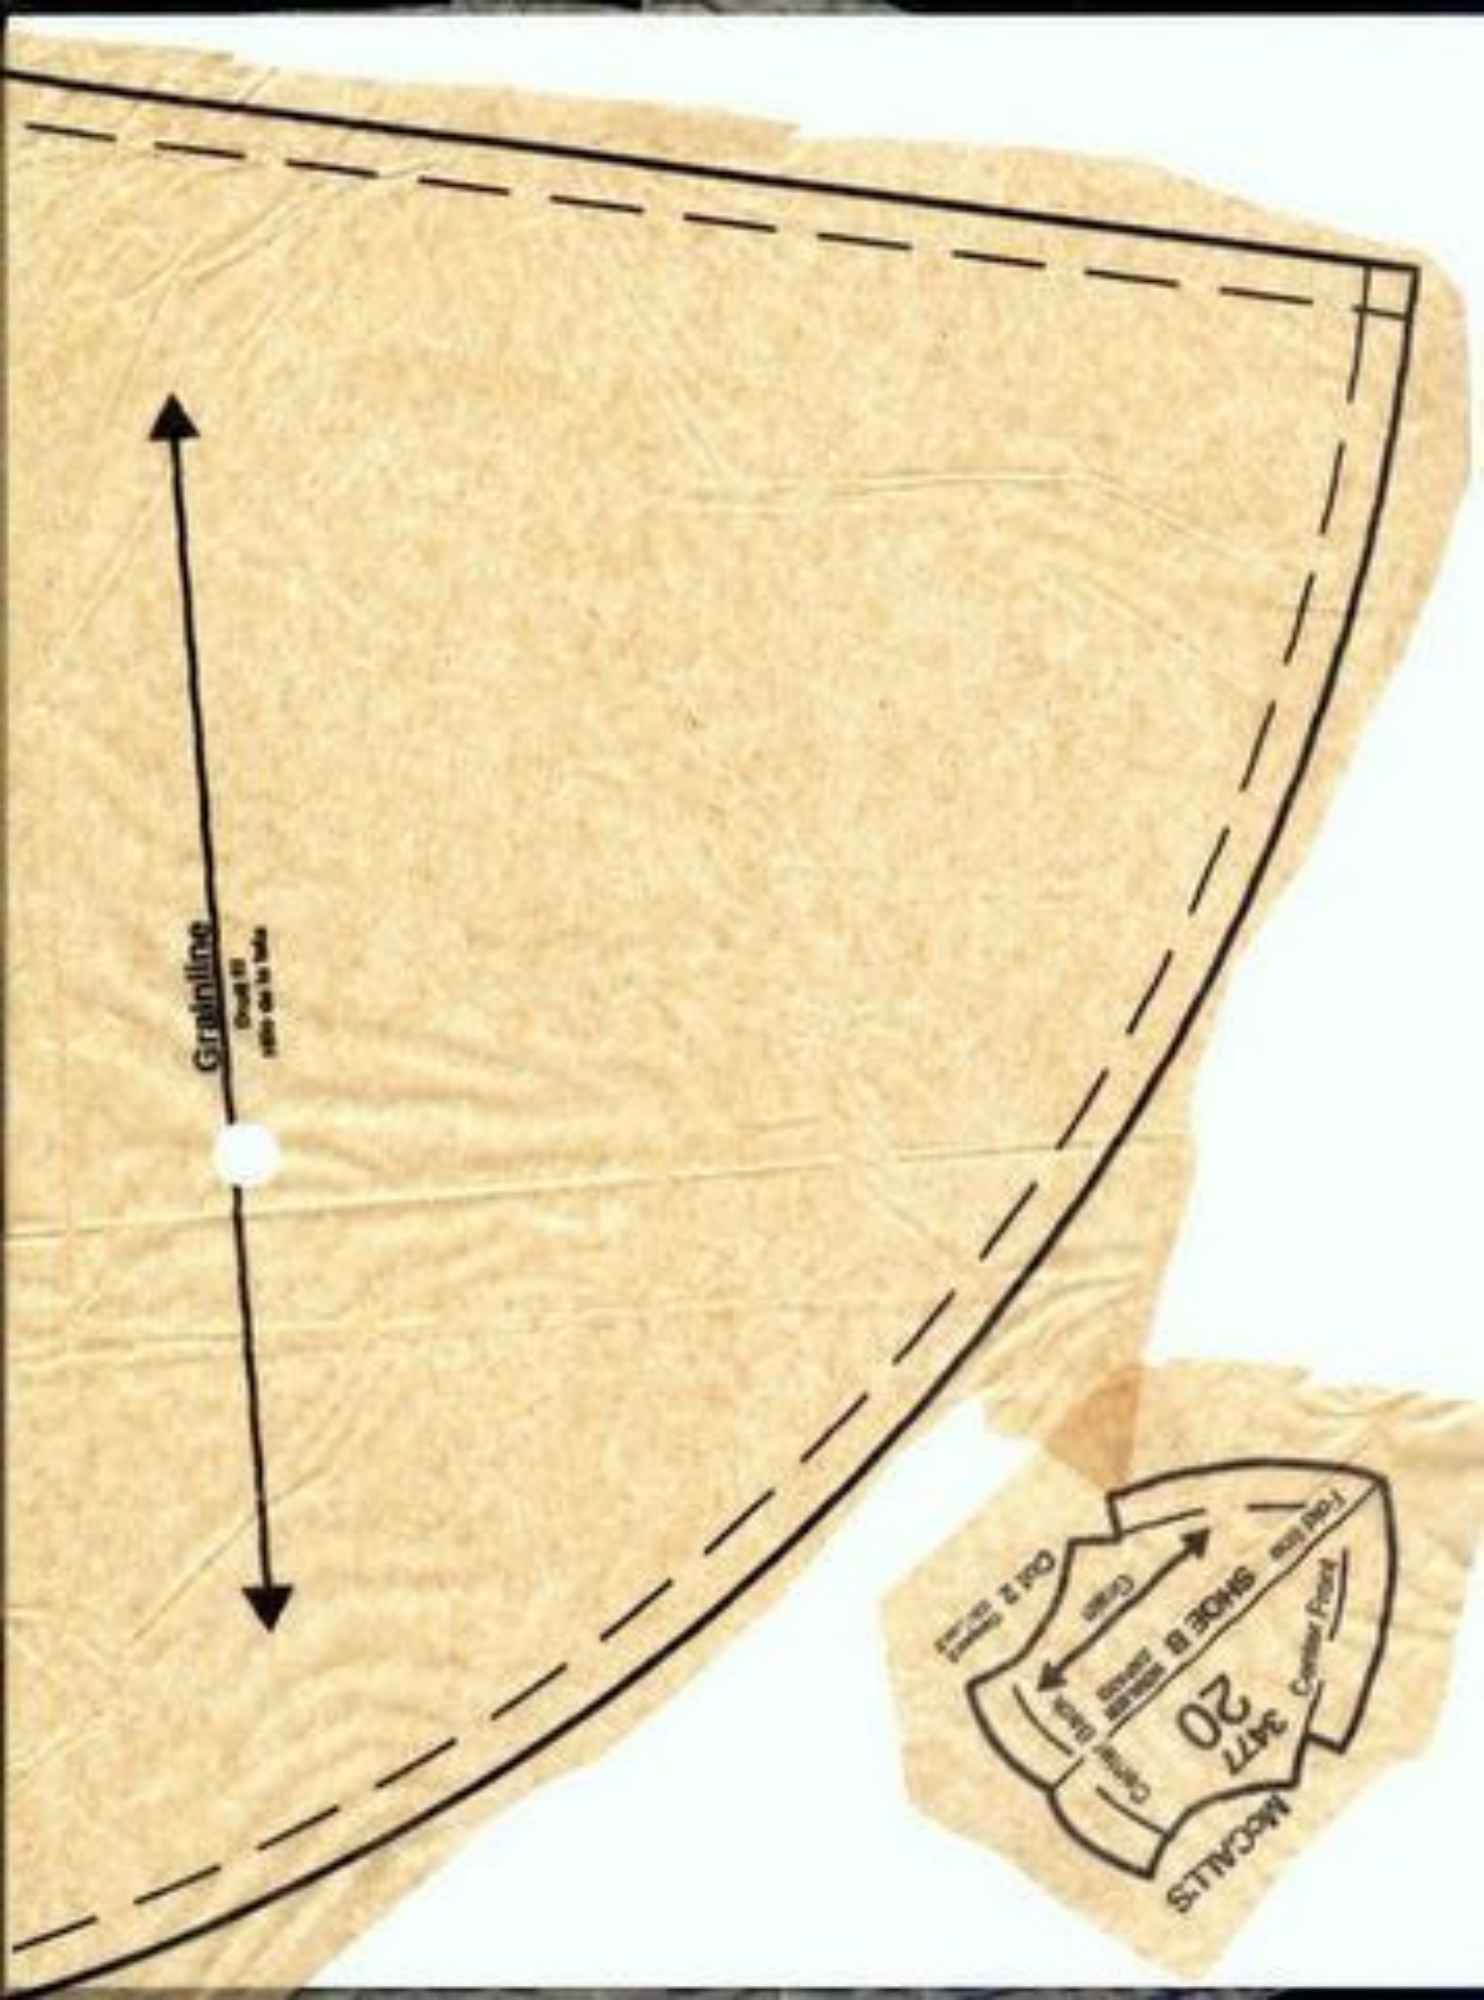
Gratiniline
MOCALLS
20
347
SHADE B
Current Point

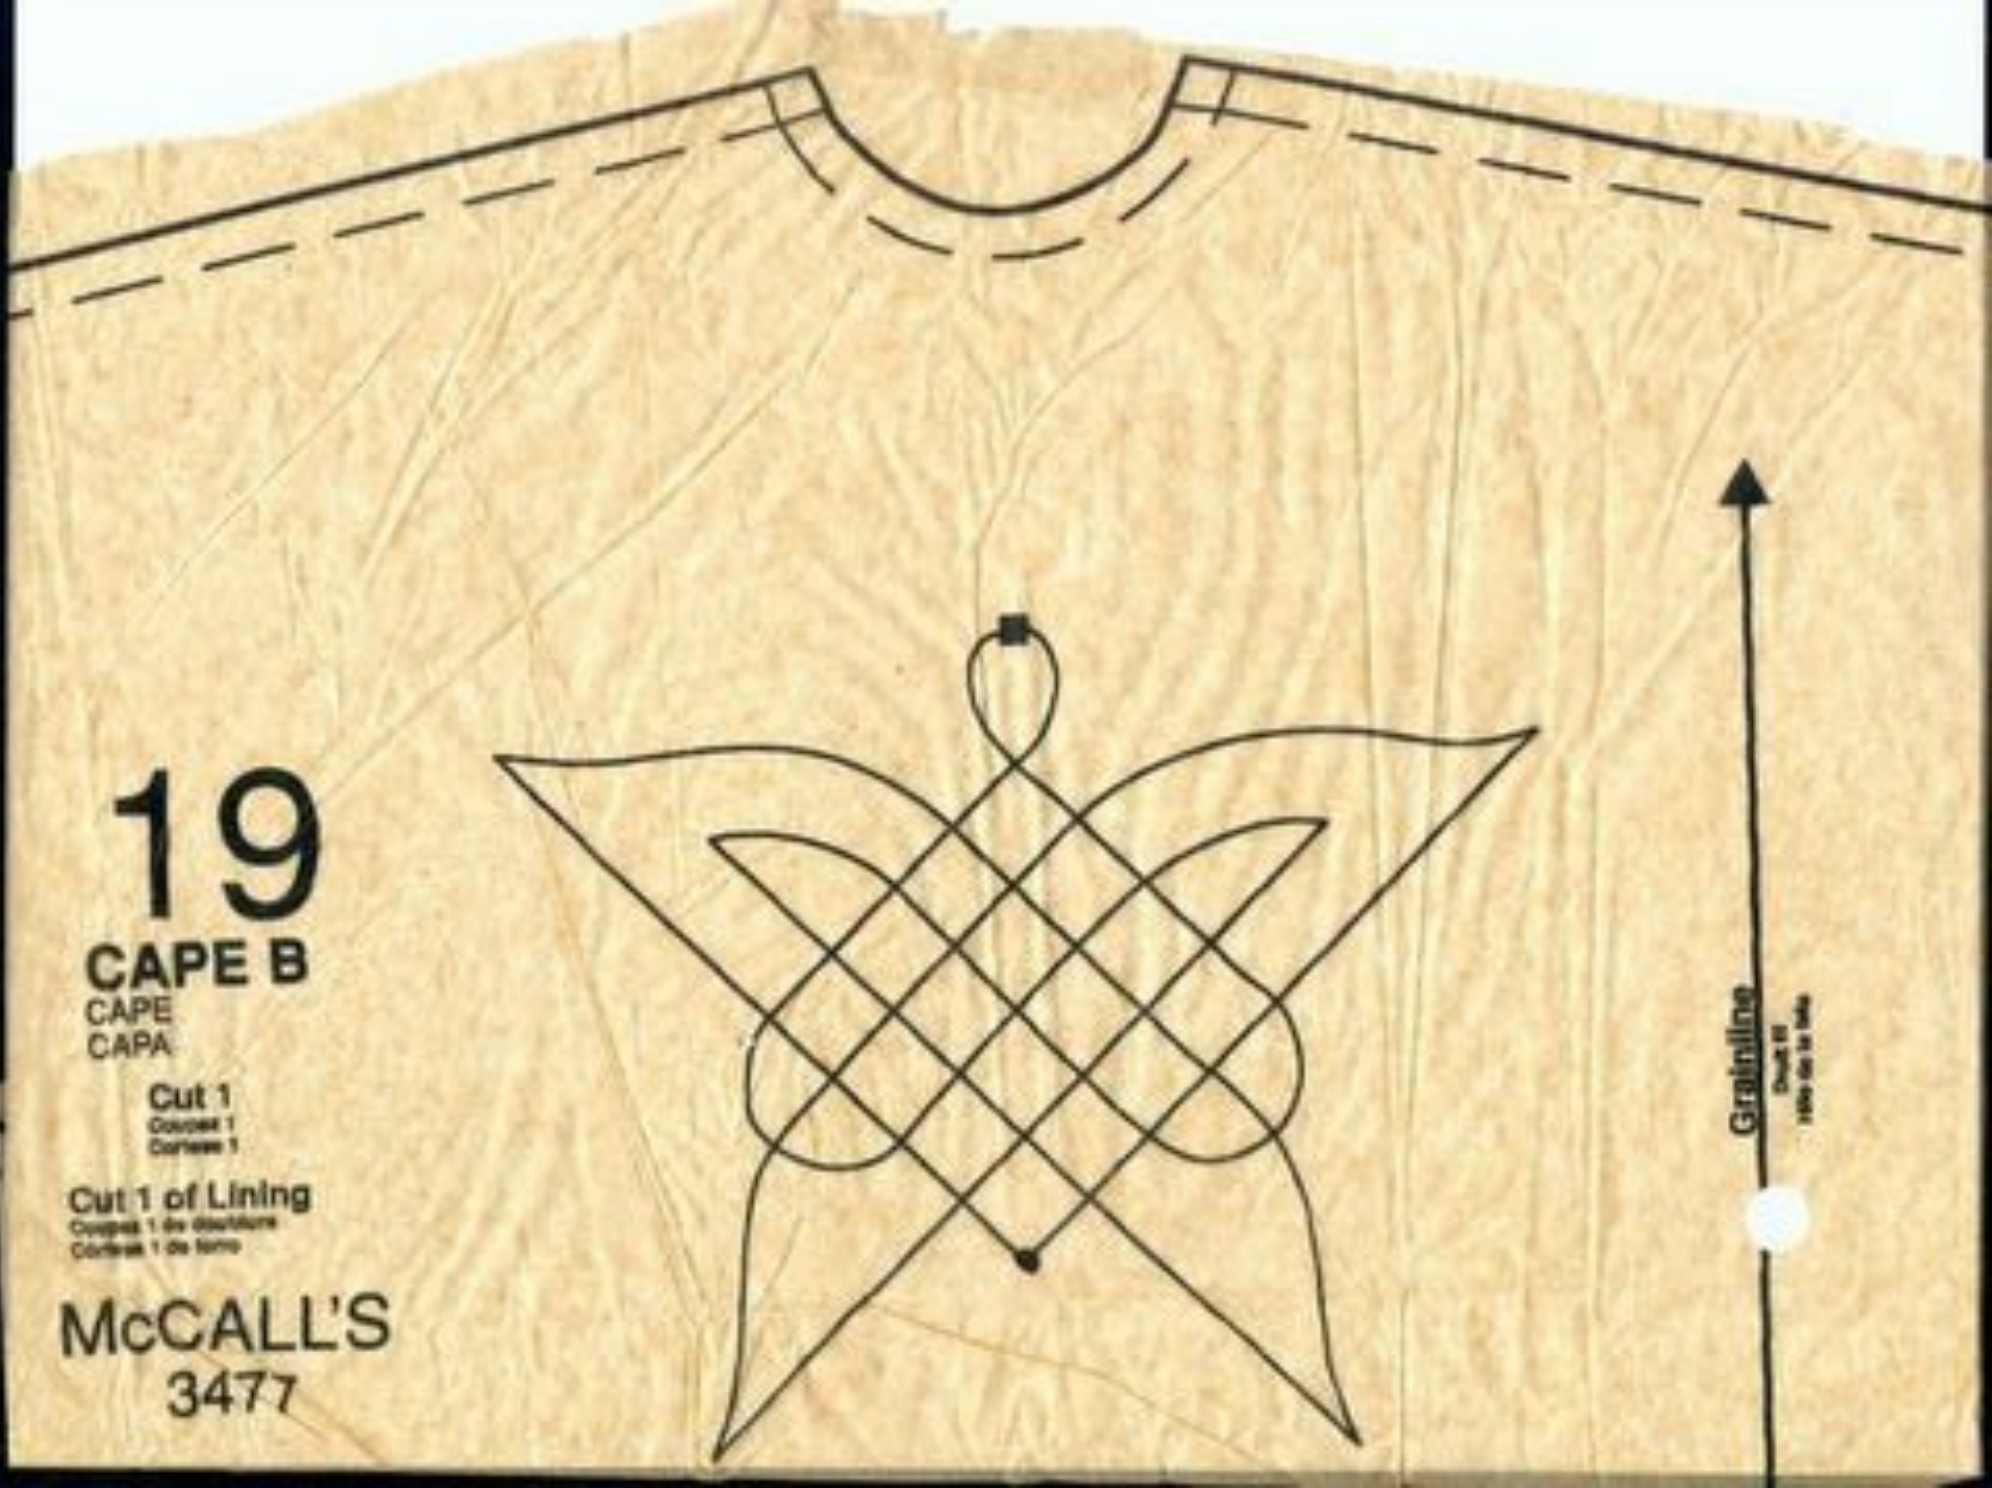
19
CAPE B
CAPE
CAPA
Cut 1
Cut 1 of Lining
McCALL'S
3477
Grainline

19

CAPE B

CAPE
CAPA

Cut 1
Coupez 1
Cortase 1

Cut 1 of Lining
Coupez 1 de doublure
Cortase 1 de forro

McCALL'S
3477

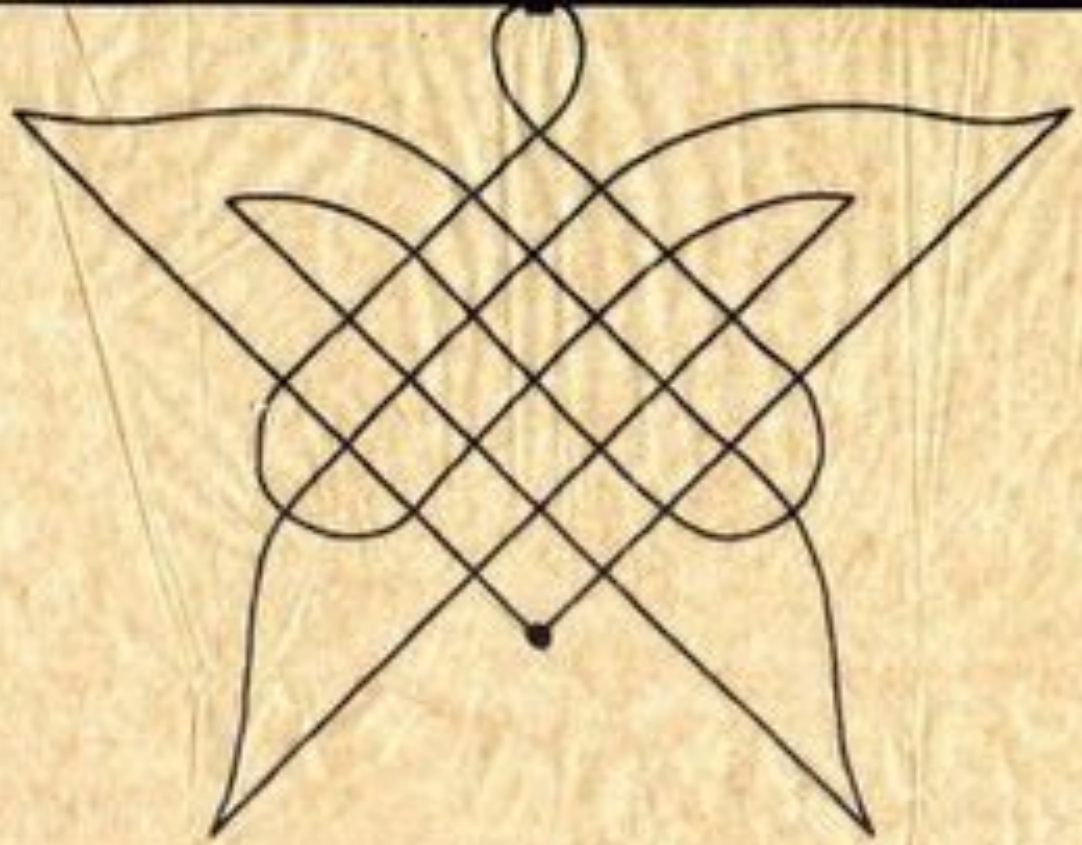

Grainline

IMPORTANT: 1/4" SEAMS are allowed on all sewing edges unless otherwise specified on the pattern.

AVIS IMPORTANT: Une couture de 6mm est prévue sur chaque bordure à moins d'indications contraires sur le patron.

IMPORTANTE: Se prevee 6mm para costura en todos los bordes a menos que se especifique otra cosa en el patrón.

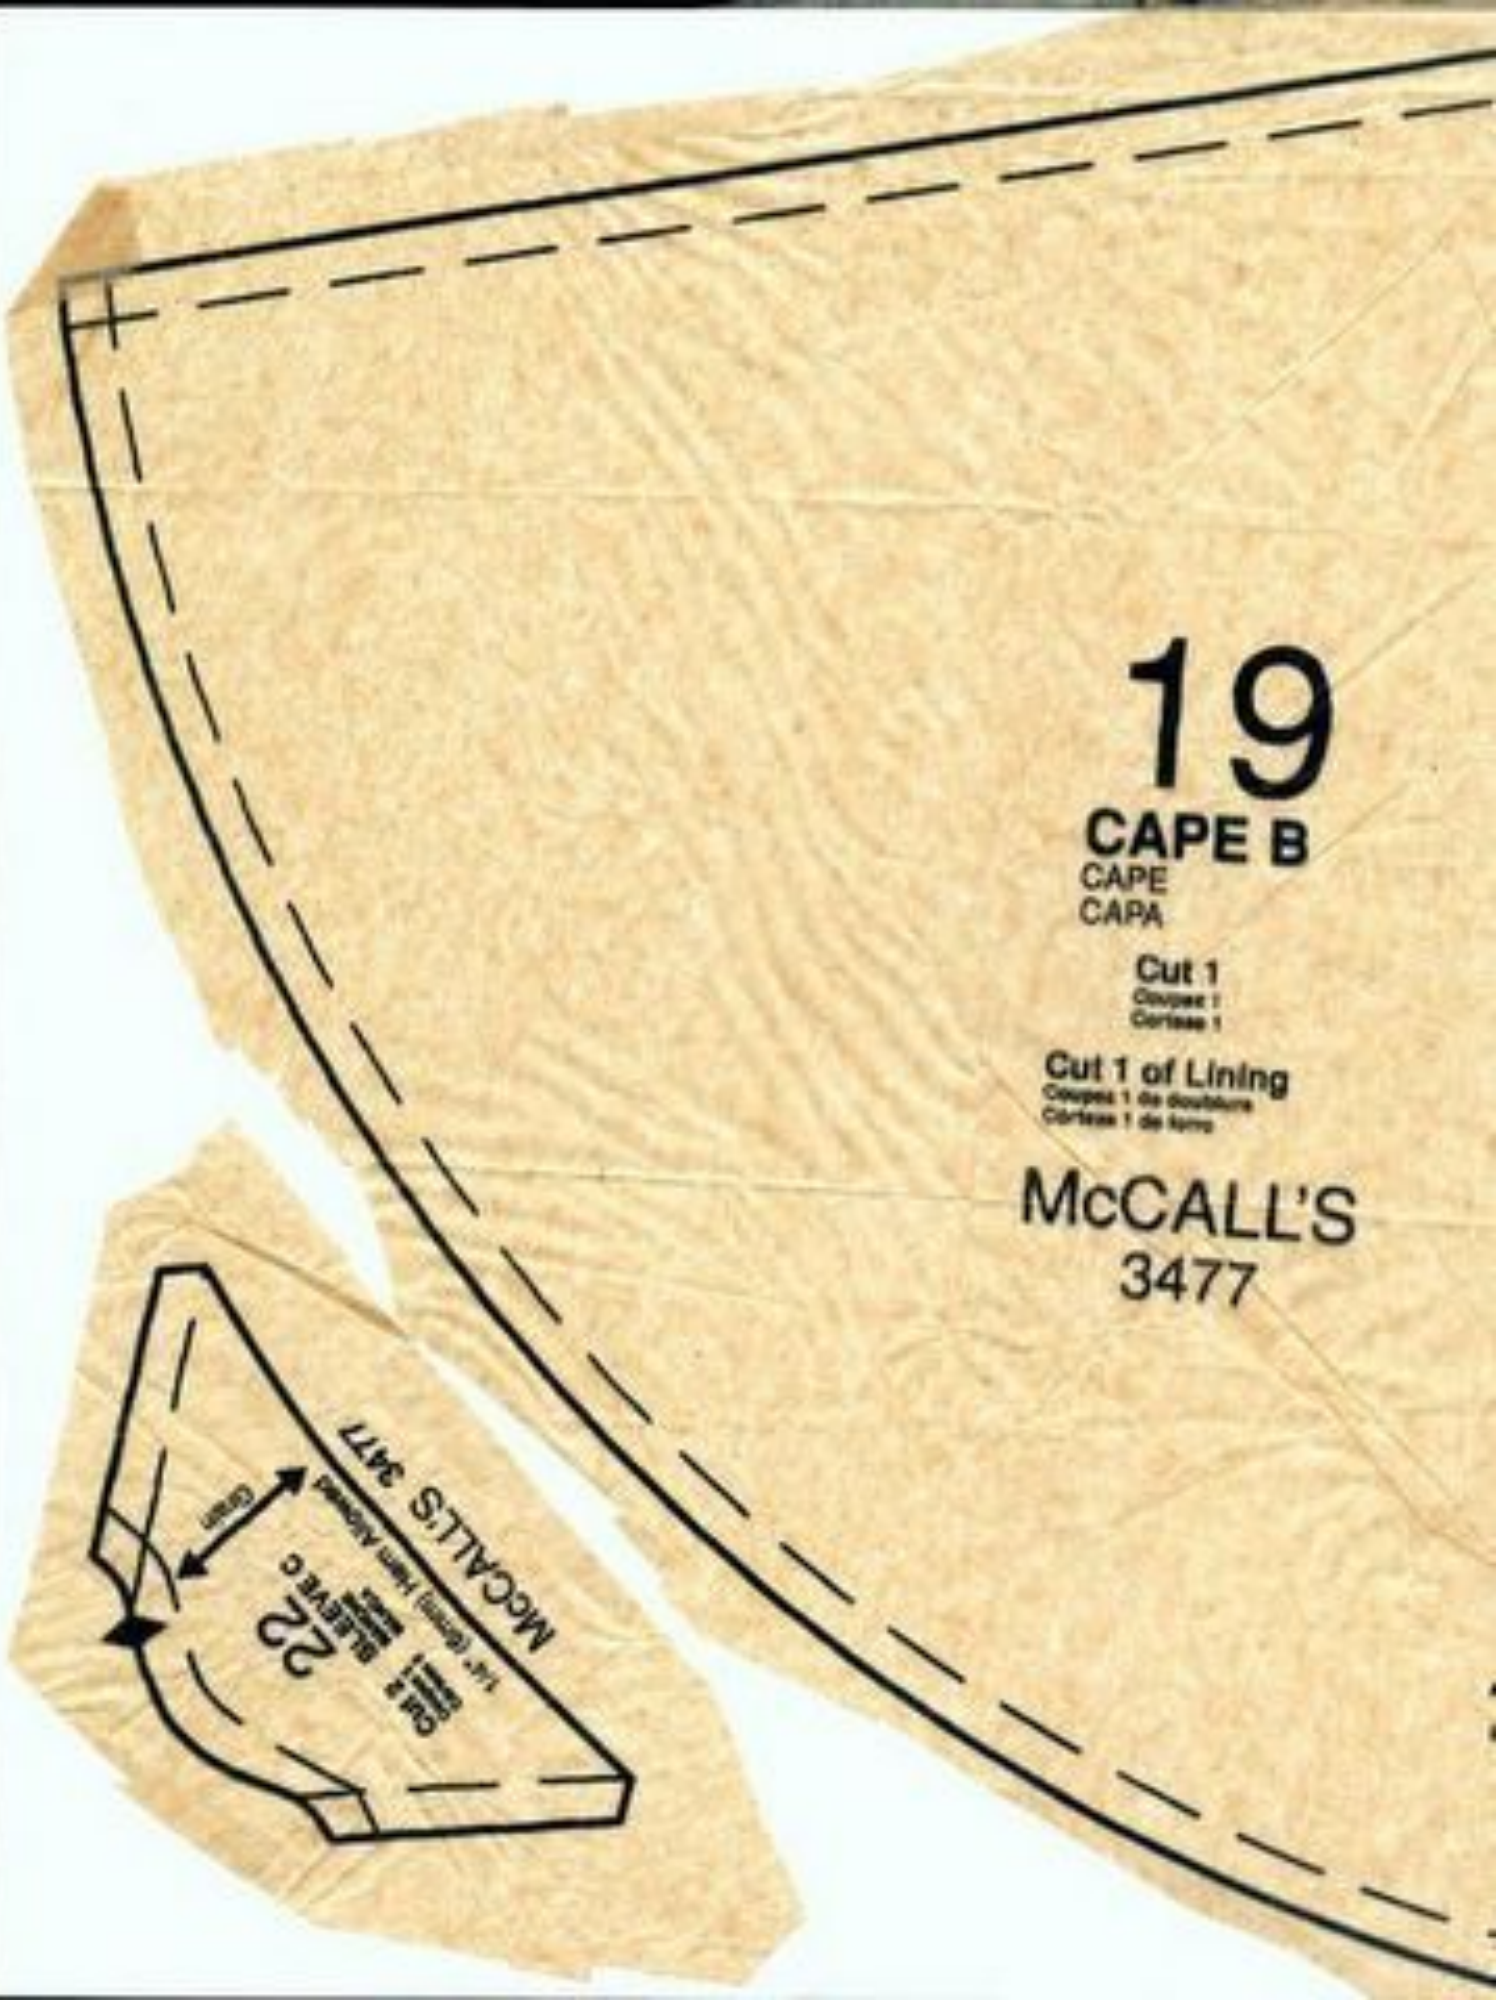
19
CAPE B
CAPE
CAPA
Cut 1
Cut 1 of Lining
McCALL'S
3477

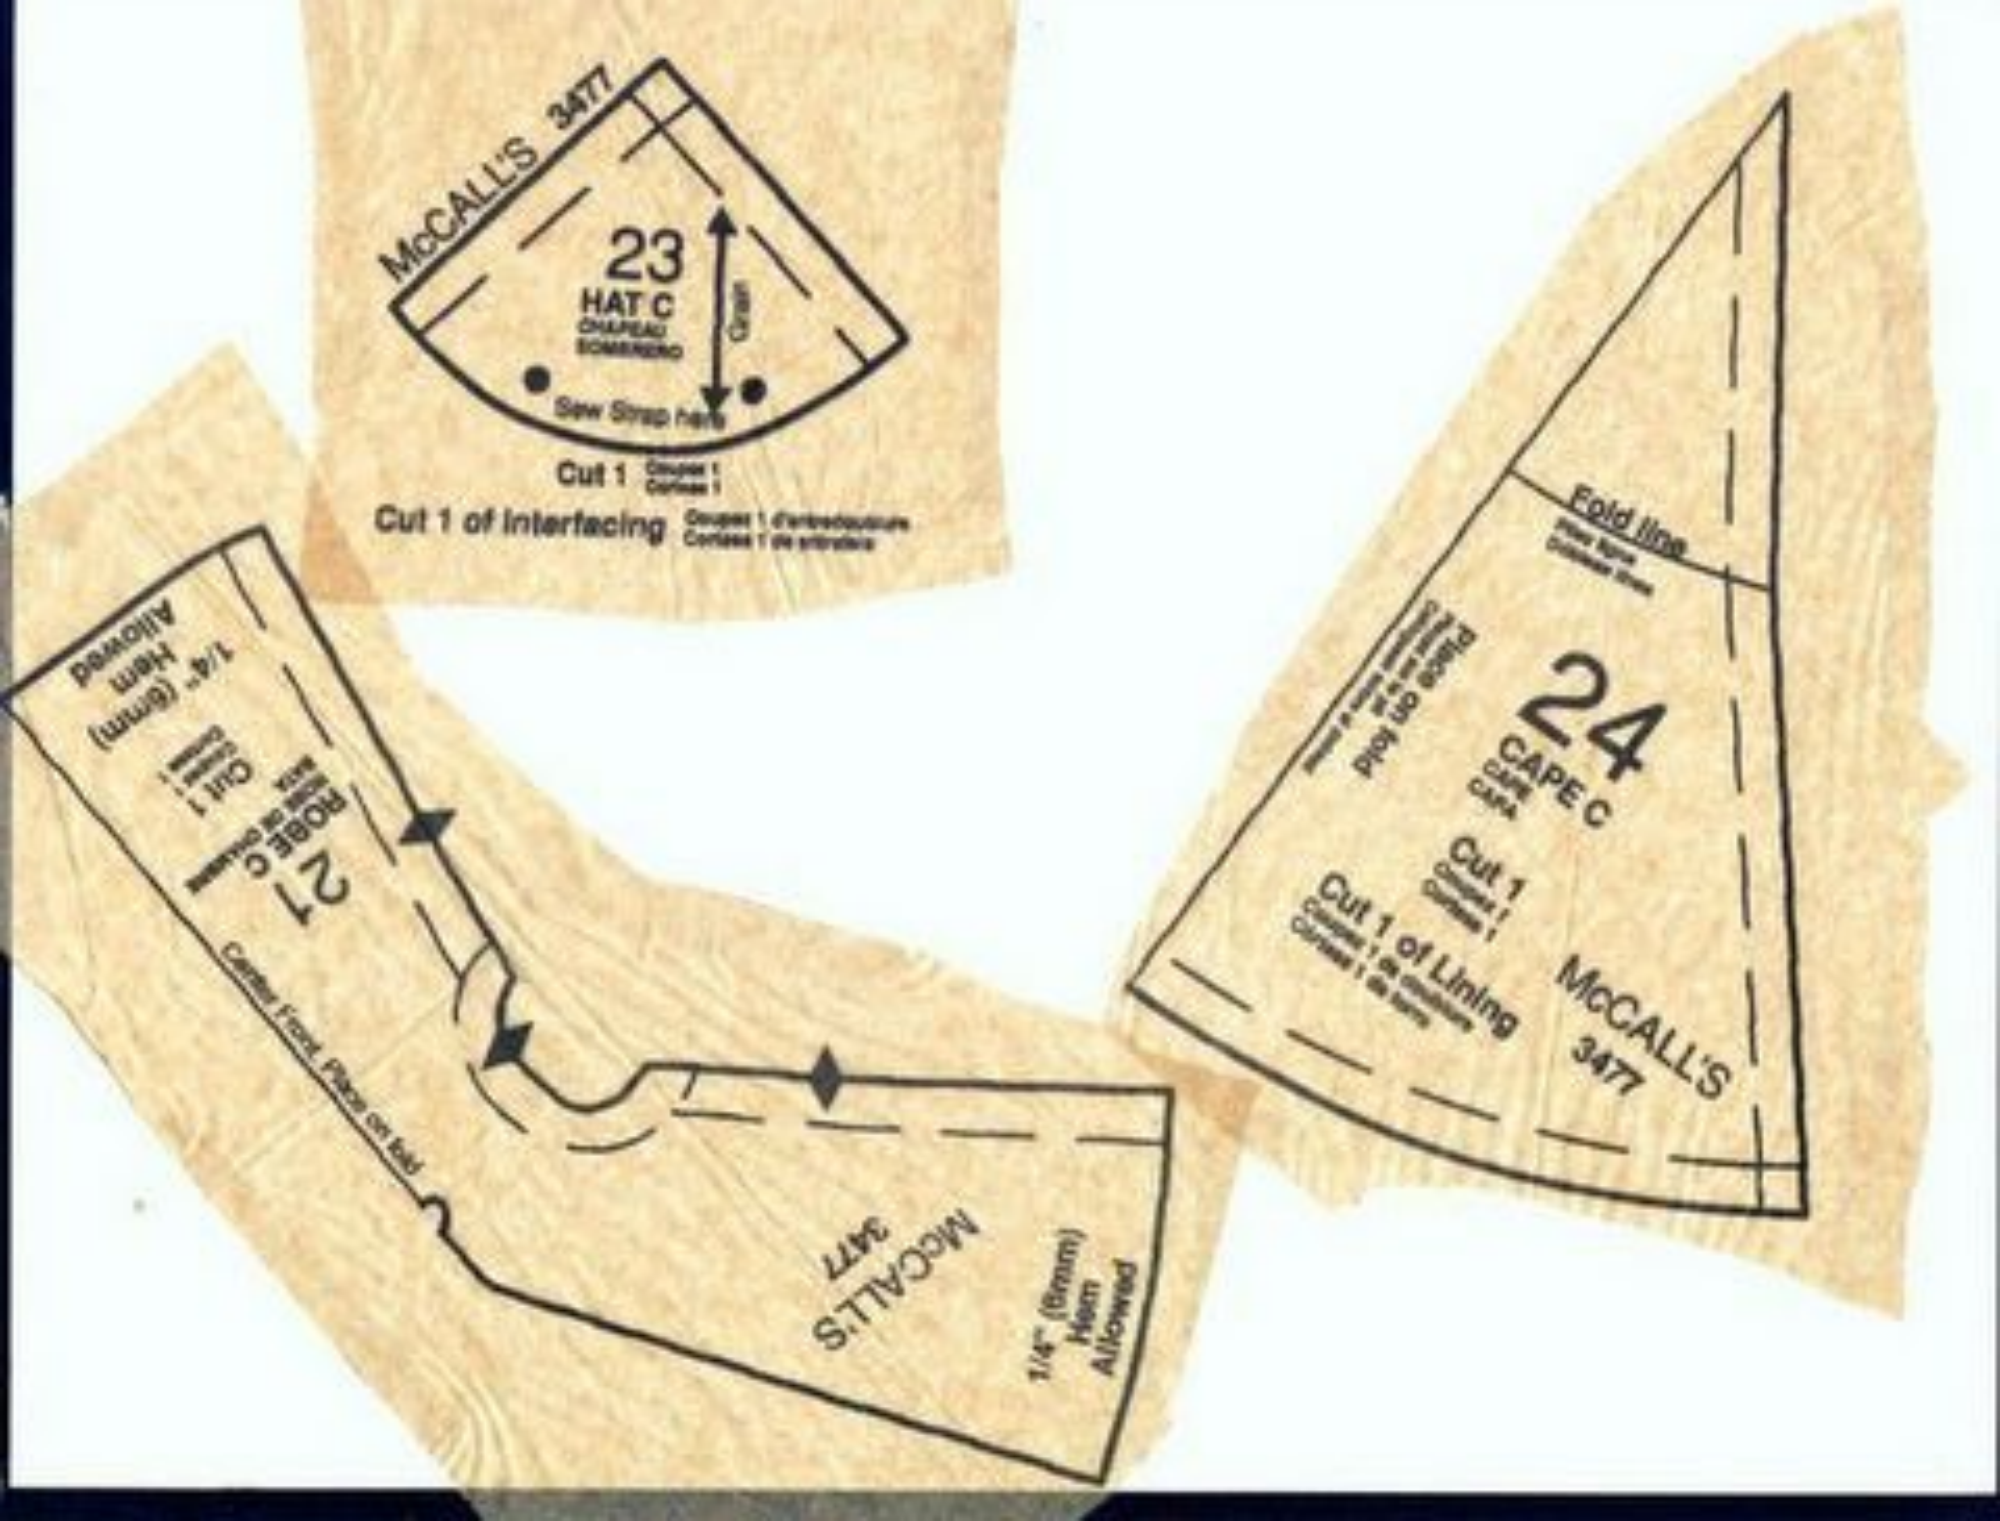
McCALL'S 3477
23
HAT C
CHAPEAU
SOMBRERO
Sew Strap here
Cut 1
Cut 1 of Interfacing
24
CAPE C
Fold line
Cut 1
Cut 1 of Lining
McCALL'S
3477
27
ROBE C
Cut 1
1/4" (6mm) Hem Allowed
McCALL'S
3477
1/4" (6mm) Hem Allowed

McCALL'S
Cut 1
Back Edge
For gown
3
FACING A
3477

HT SIDES TOGETHER, matching
etween squares.

robe.

e and sleeve, RIGHT SIDES
es and squares. Stitch, breaking

Turn facing to INSIDE. Press.

Hand-sew upper edge of facing to sleeve.

Pin two BAND (15) sections, RIGHT SIDES TOGETHER. Stitch side seams.

15

Stitch remaining band sections in

Turn seam allowances toward robe.

With RIGHT SIDES UP, pin narrower trim to lower edge of robe, centering over band seam and turning under one end and lapping over the other at center back. Hand-sew in place.

TRIM

Pin narrower trim to sleeve over solid line, turning under one end and lapping over the other at seam. Hand-sew in place.

Sew socket section of snaps to positions on OUTSIDE of RIGHT back.